


### Sicherheitshaken Typ OBK

\* zusätzliche Sicherung der Hakenspitze


Bezeichnung	Tragfähigkeit t	L	B	E	F	G	H	Gewicht kg
OBK 6-10	1.5	103	26	22	9	14	17	0.4
OBK 8-10	2.5	139	37	28	10	20	22	0.8
OBK 10-10	4.0	170	47	34	13	22	29	1.3
OBK 13-10	6.7	205	54	44	15	27	35	2.4
OBK 16-10	10.0	249	68	56	19	29	43	4.2



### Sicherheitshaken Typ GBK

\* zusätzliche Sicherung der Hakenspitze

Bezeichnung	Tragfähigkeit t	L	B	G	H	Gewicht kg
GBK 6-10	1.5	87	26	14	17	0.4
GBK 8-10	2.5	119	37	20	22	0.8
GBK 10-10	4.0	150	47	22	29	1.3
GBK 13-10	6.7	172	54	27	35	2.4
GBK 16-10	10.0	207	68	29	43	4.3

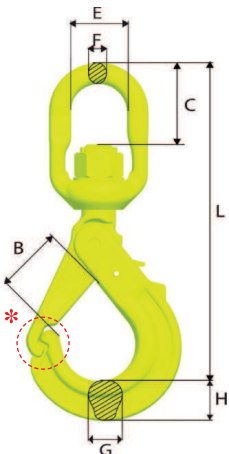


### Sicherheitshaken mit Wirbel Typ LBK

mit Messinglager

\* zusätzliche Sicherung der Hakenspitze

Bezeichnung	Tragfähigkeit t	L	B	C	E	F	G	H	Gewicht kg
LBK 8-10	2.5	176	37	27	38	12	20	22	0.8
LBK 10-10	4.0	213	47	35	42	15	22	29	1.8
LBK 13-10	6.7	236	54	47	48	19	27	35	3.8
LBK 16-10	10.0	324	68	66	61	23	29	43	6.0

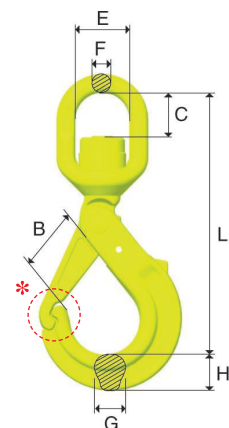


### Sicherheitshaken mit Wirbel Typ LKBK

mit Kugellager

\* zusätzliche Sicherung der Hakenspitze


Bezeichnung	Tragfähigkeit t	L	B	C	E	F	G	H	Gewicht kg
LKBK 8-10	2.5	176	37	27	38	12	20	22	0.8
LKBK 10-10	4.0	213	47	35	42	15	22	29	1.8
LKBK 13-10	6.7	236	54	47	48	19	27	35	3.8
LKBK 16-10	10.0	320	68	61	61	23	29	43	6.0



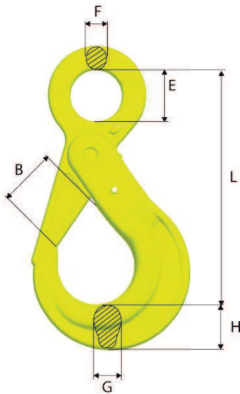


### Sicherheitshaken Typ BK

Bezeichnung	Tragfähigkeit t	L	B	E	F	G	H	Gewicht kg
BK 6-10	1.5	109	29	22	10	15	21	0.5
BK 8-10	2.5	137	37	28	11	17	25	0.9
BK 10-10	4.0	168	44	34	13	21	30	1.5
BK 13-10	6.7	207	54	44	16	30	39	2.8
BK 16-10	10.0	253	62	56	20	37	49	5.6
BK 20-10*	16.0	290	68	60	22	42	63	8.3




### Sicherheitshaken Typ BKG

Bezeichnung	Tragfähigkeit t	L	B	G	H	Gewicht kg
BKG 6-10	1.5	91	29	15	21	0.5
BKG 8-10	2.5	121	37	17	25	0.9
BKG 10-10	4.0	142	44	21	30	2.1
BKG 13-10	6.7	180	54	30	39	3.0
BKG 16-10	10.0	225	62	37	49	5.7
BKG 20-10*	16.0	240	68	42	63	8.3

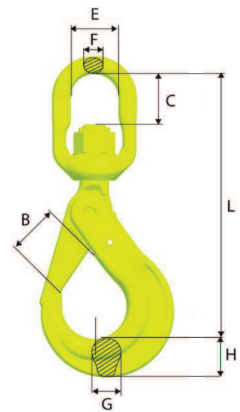

### Sicherheitshaken mit Wirbel Typ BLK

Bezeichnung	Tragfähigkeit t	L	B	C	E	F	G	H	Gewicht kg
BKL 8-10	2.5	183	37	27	38	12	17	25	1.2
BKL 10-10	4	218	44	36	42	15	21	30	2.0
BKL 13-10	6.7	280	54	47	48	19	30	39	3.8
BKL 16-10	10	343	62	57	61	22	37	49	7.1
BKL 20-10*	16	367	69	70	74	26	42	63	11.1

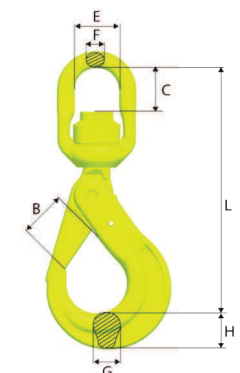

### Sicherheitshaken mit Wirbel Typ BKLK mit Kugellager

Bezeichnung	Tragfähigkeit t	L	B	C	E	F	G	H	Gewicht kg
BKLK 8-10	2.5	184	37	27	38	12	17	25	1.2
BKLK 10-10	4	218	44	35	42	15	21	30	1.9
BKLK 13-10	6.7	281	54	45	48	19	30	39	3.8
BKLK 16-10	10	339	62	63	61	22	37	49	7.2
BKLK 20-10*	16	367	69	59	74	26	42	63	11.3



\* Lieferbar ab 2008